


Dynamic lightbox engine

We bring your visual to life.

Making it dynamic by adding animation and movement.

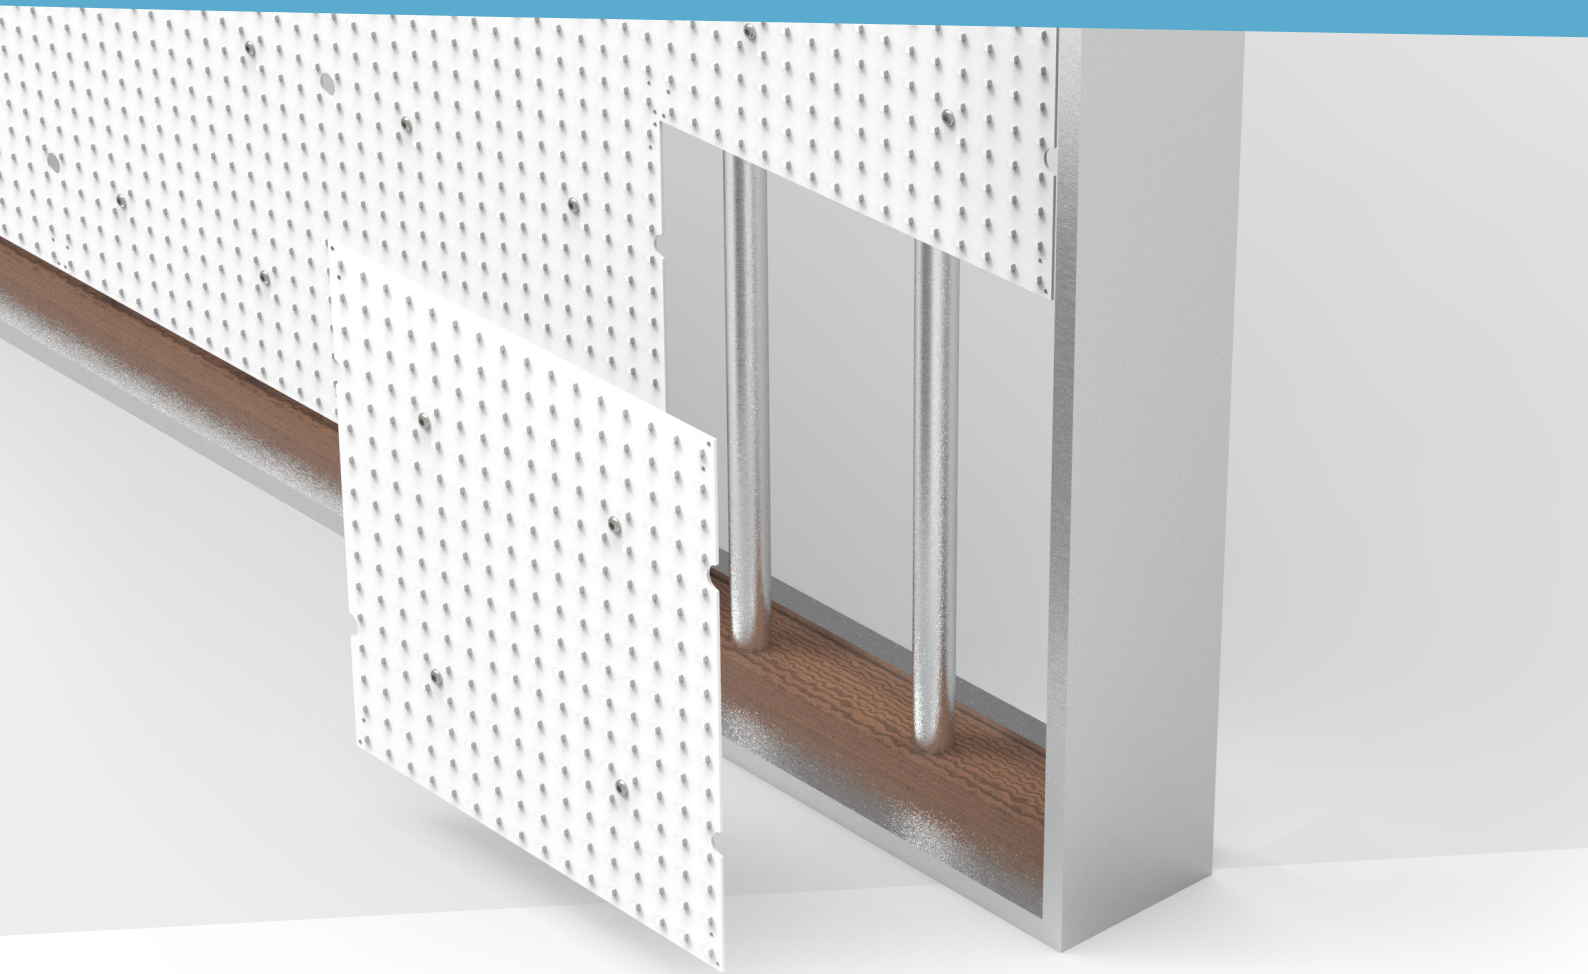

Easy and flexible
print change



Near zero
maintenance



Supports **various**
media files



Day and night mode
(multilayer compatible)



Integrated **power**
management



Easy to build
modular design



RGB full color



Easy scaling

Concept

Combining **high resolution** print (single or multi layer) with **LED video animation**.



More **powerful advertising, communication** and **branding** thanks to:

- Stopping power
- Story telling capabilities
- Emotional involvement

Providing **business value** by:

- Increased revenue and brand value
- Cost effective solution, one time hardware investment and lifelong campaign
- Continuity by regular content refresh

3 step process

1 creation

- ideation
- visual design
- animation concept



2 production

- hardware
- print visual
- animation



3 deployment

- mechanical setup
- print mounting
- animation upload



Technical Specifications

	P20 RGB	P12 RGB
Pixel pitch	20 mm	12 mm
Peak power consumption (full on)	23W/panel	23W/panel
Voltage	5 V DC	5 V DC
Light output	Depending on the print graphics	Depending on the print graphics
Total panels limit	unlimited	unlimited
IP rating	IP20	IP20
Operating temperature	5°C - 30°C	5°C - 30°C
warranty	2 years	2 years
Certification	CE	CE
Fire rating	DIN 4102 B1	DIN 4102 B1
Dimensions (mm)	320x320 320x160 160x320 160x160	192x192

